




慈溪市远创塑料容器有限公司

CIXI YUAN CHUANG PLASTIC CONTAINER CO., LTD.

品质第一 | 客户至上 | 携手共进 | 追求卓越

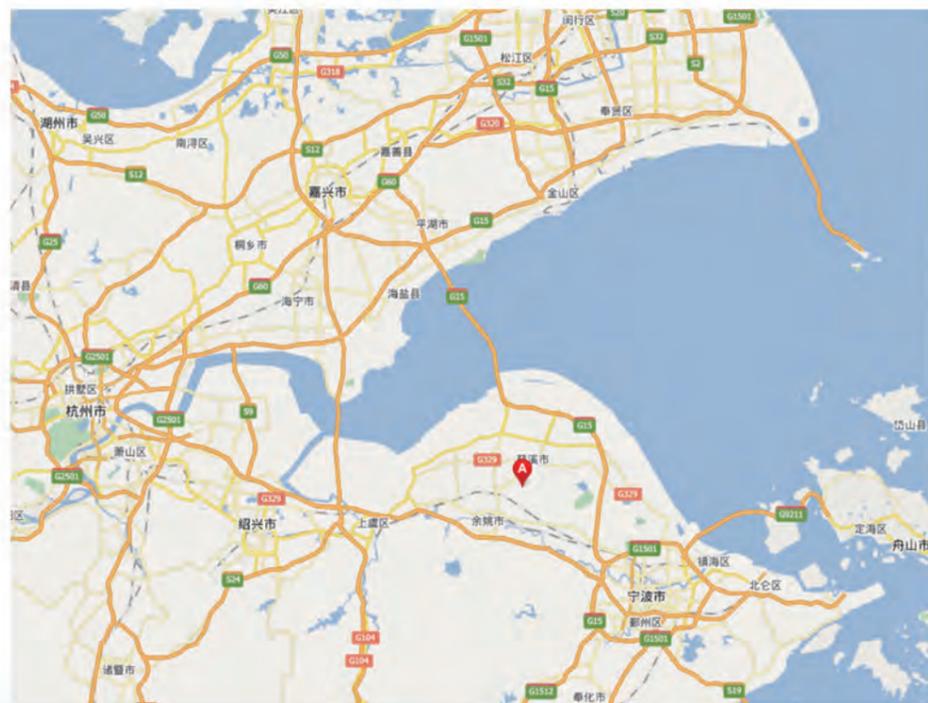

Quality First
The pursuit of excellence

慈溪市远创塑料容器有限公司

CIXI YUAN CHUANG PLASTIC CONTAINER CO., LTD.

地址：浙江省慈溪市横河镇梅湖湖东工业区

电话：0574-63539806 / 63250939 / 63539659

传真：0574-63250938

手机：013626837735 / 013777932420

网址：www.cnslrq.com / www.ycrongqi.com

邮箱：yc@ycrongqi.com



扫描二维码进入本企业网站

远创塑料容器

以创新为动力 以质量求发展

DRIVEN BY INNOVATION
QUALITY AND DEVELOPMENT

公司简介 / Company profile

慈溪市远创塑料容器有限公司是一家专业生产、开发各类大型及超大型塑胶普力容器的企业。公司的所有产品均严格遵循中华人民共和国 GB9687-88 质量标准生产，取用顶级进口的聚乙烯（PE 食品级、耐酸碱）塑胶原料及配方用料，以优良的卫生性和综合机械物理性，丰富的力学原理为基础，生产出一体成型、无焊无缝、无毒无味、耐酸碱、耐碰撞、耐高温（80℃），耐冷冻（-40℃），安装运输安全便捷，无需维修等优点，成为国际公认的理想塑胶容器。本公司产品品质由中国人民保险公司提供质量保险。

产品深得各界的厚爱，已广泛应用于化工行业（化学制剂、化工设备）、电子业、石油化工、纺织印染、医药食品、酿造制糖、蔬菜腌制、水处理业、水产养殖、冷冻冷藏等储存、运输、调和、可替代钢衬胶，板材焊接，玻璃钢和陶土罐。

公司在“以创新为动力，以质量求发展”的基础上，仍秉承“品质第一、客户至上、携手共进、追求卓越”的质量方针，以更高的企业品质回报各界的支持与厚爱，不断创造出更多、更好、更新的产品。

Cixi plastic container plant is far from creating a professional production, development of all types of large and very large force of plastic containers & P business. All products are strictly follow the Republic of China GB9687-88 quality standards, access to top-level imports of polyethylene (PE food grade acid) formulations of plastic raw materials and materials to good health and integrated mechanical and physical nature mechanics based on the rich to produce one piece, without welding seamless, non-toxic, odorless, acid and alkali resistance, impact, high temperature (80 ℃), anti-freeze (-40 ℃), transport safety and convenient to install, no maintenance, etc. advantages,

Become an internationally recognized plastic containers ideal. The quality of our products by the China People's Insurance Company to provide quality insurance.

Product won the love of all sectors, has been widely used in chemical industries (chemicals, chemical equipment), electronics, petrochemical, textile printing and dyeing, medicine, food, brewing sugar, pickled vegetables, water treatment industry, aquaculture, refrigerated such as storage, transport, reconcile, and can replace steel, rubber lined, welded plate, glass, steel and clay pot.

In the "innovation-driven, quality development," based on the still adhering to the "quality first, customers first, work together, the pursuit of excellence" quality policy, quality of return to higher business circles of support and love , continue to create more, better, newer products.

产品目录

Product Contents

- | | |
|---------------------------------------------------|--------------------------------------------------------------------|
| 01 远创简介
Company Yuanchuang | 16 水产桶（海鲜运输桶）系列
Aquatic Barrel(Seafoodtransport barrels) Series |
| 03 平底储罐系列
Flat Tank Series | 17 加药箱溶盐箱系列
Medicine Tank Salt Dissolving Tank Series |
| 07 锥底储桶系列
Conical Bottom Storage Barrel Series | 19 农用船及浮体系列
Agricultural Boat And Pontoon Series |
| 09 方桶（周转箱、印染布车等）系列
Square Barrel Series | 20 化粪池系列
Septic Series |
| 13 圆桶系列
Drum Series | 21 配件系列
Accessories Series |
| 15 卧式储罐系列
Horizontal Stocking Tank Series | 22 安装使用说明
Installation Instructions |

容器文化

容器是日常生活中的常见品，就其本身的造型与特点而言，并没有特别的优势。但“万物以容为贵”，从这层意义上思考，容器给人们带来的生活是其他物品无法并论的。从远古时代的弯木成瓢，到现代科技所创造的各类精致容器，容器的发展方便了人们的生活，也延续了一条独特的“容文化”哲学。



FLAT TANK SERIES

平底储罐系列

平底储罐 / Flat Tank

采用进口食品级 PE 原料，滚塑一次成型。产品适用于水处理、环保、电子、化工、食品、医药、建筑等各行业。
性能：一次成型内外光滑，具有良好的卫生性、耐酸碱、耐腐蚀、耐高温（60度），耐冷冻、耐撞击、不易老化、易清洗，安装移动方便。
常用颜色：白、蓝、黑、桔黄等

Imported food grade PE material, rotational molding. Products for water treatment, environmental protection, electronics, chemicals, food, medicine, construction and other industries.

Performance: forming a smooth inside and outside, with good health, acid, corrosion resistance, high temperature (60 degrees), freeze-resistant, impact-resistant, not aging, easy to clean, install and easy to move.

Commonly used colors: white, blue, black, orange, etc.

平底储罐参数表 / Flat Tank parameter table

单位：mm

名称	型号	直径	垂高	总高	壁厚		盖直径	常规接口
					B	特		
平底 储 桶	PT-250L	660	750	950	5	7	400	20
	PT-400L	770	910	1080	5	7.5	400	20
	PT-500L	800	1000	1230	5.5	7.5	400	20
	PT-1000L	1070	1100	1330	6	8	400	25
	PT-2000L	1310	1500	1810	7.5	9.5	400	40
	PT-3000L	1600	1700	2050	9	11	400	50
	PT-4000L	1820	1650	2050	9	11	500	50
	PT-5000L	1840	1900	2280	8/10	9/11.5	600	50
	PT-6000L	1900	2060	2560	9.5/10.5	10/11.5	600	50
	PT-8000L	2300	2060	2510	9/11	11/12.5	600	50
	PT-10000L	2310	2460	2930	10/12	11.5/14	600	50
	PT-15000L	2750	2830	3320	11/14	13/16	600	50
	PT-20000L	2800	3300	3750	15/18	17/21	600	50
	PT-30000L	3200	3700	4250	18/21	19.5/23	600	80



PT-250L



PT-3000L



PT-5000L



PT-10000L



PT-20000L




PT-30000L



FLAT TANK SERIES

平底儲罐系列

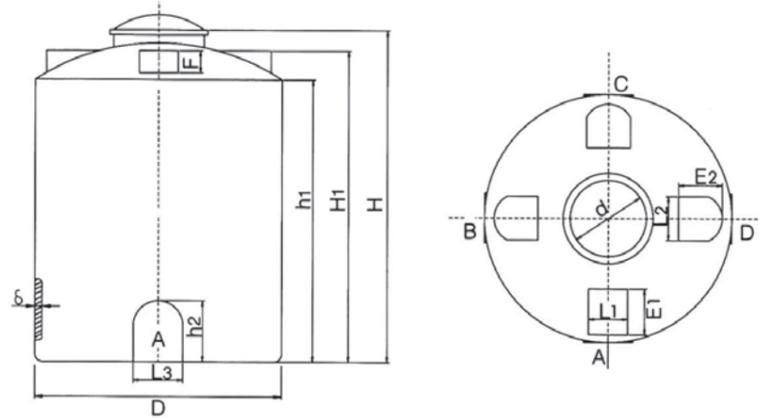

※ 因滾塑行业的特殊性，本表格所有产品的尺寸、容量 ± 3%；慈溪市远创塑料容器有限公司 电话：0574-63250939/63539806 传真：0574-63250938

CONICAL BOTTOM TANKS SERIES

锥底储罐系列

锥底储罐 / Conical Bottom Tanks

选用进口食品级 PE 原料，一次性滚塑成型，无焊缝，耐磨耐老化。桶体为倾斜锥底和底部正中间锥底，配相应的支撑底座。桶内液体可一次排净，无残留物，方便清洗。供水蓄水，水处理、化工、环保、建筑、化工、稀土、染料、食品原料、医药等各行业。

Imported food grade PE material, no weld disposable rotational molding, abrasion resistance, aging resistance. The barrel body is tilted cone bottom and bottom middle cone bottom, supporting frame corresponding. The liquid inside the bucket can be a row of the net, no residue, convenient cleaning. Water storage, water treatment, chemical industry, environmental protection, construction, chemical industry, rare earth, dyes, food raw materials, pharmaceutical and other industries.




锥底储桶参数表 / Parameters of Conical bottom storage barrel

单位: mm

名称	型号	直径 mm	垂高 mm	总高 mm	壁厚 mm		盖直径 mm	常规接口
					B	特		
锥底储桶	CPT-250L	650	750	1150	5	6.5	400	20
	CPT-400L	770	1120	1430	5	6.5	400	20
	CPT-500L	800	1080	1460	5	7	400	20
	CPT-1000L	1070	1100	1680	6	8	400	25
	CPT-2000L	1320	1410	2050	7.5	9	400	40
	CPT-3000L	1580	1650	2280	9	11	400	50
	CPT-5000L	1880	1740	2450	9.5	12	600	50
	CPT-6000L	1900	2050	2980	10	12	600	50
	CPT-10000L	2300	2470	3620	10/12	11.5/13	600	50



CPT-250L

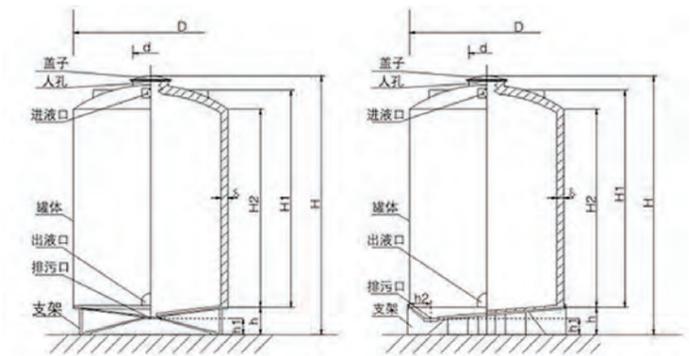

CPT-1000L



CPT-5000L



CPT-3000L



锥底桶支架 (全铺钢板)

SQUARE BARREL SERIES

方桶（周转箱、印染布车等）系列

方型桶 / Square barrel

桶体采用进口 PE 原料，滚塑一次成型。可配上车架及轮子，移动灵活，具有较强的耐 撞击和耐磨性，较好的卫生性和耐腐蚀性。既可做为车间周转用、运输物流用，亦可做为储存整理箱。广泛应用于纺织、印染、服装、食品、化工、电子、五金、养殖、轻工、家居等行业。

方型桶参数表 / Square barrel parameter table

名称	型号	上口 mm	下口 mm	高度 mm	边宽 mm	
		长 × 宽	长 × 宽			
方	K-26L	280 × 200	250 × 180	485	20	
	K-30L	450 × 305	440 × 290	200	20	
	K-45L	410 × 335	390 × 320	340	30	
	K-50L	640 × 410	620 × 400	200	40	
	K-90L	640 × 400	590 × 390	380	30	
	K-150L	640 × 480	630 × 430	530	30	
	K-200L	750 × 540	655 × 455	605	45	
	K-300L 高 (水产专用)	730 × 520	650 × 450	880	50	
	K-300L 低	960 × 560	940 × 520	610	50	
	K-350L	1180 × 600	1080 × 630	430	60	
	K-500L	1180 × 600	1120 × 520	730	60	
	K-520L	1210 × 805	1100 × 700	600	60	
	K-550L 可叉车	1150 × 620	1110 × 610	800	40	
	K-590L	960 × 960	880 × 880	700	55	
	K-700L	1470 × 920	1180 × 860	500	60	
	K-720L	1400 × 900	1340 × 845	600	60	
	桶	K-820L	1630 × 800	1590 × 750	650	50
		K-920L	1480*880	1430 × 830	750	65
		K-950L	1560 × 1045	1220 × 930	660	65
		K-1000L	2000 × 1000	1950 × 950	500	65
K-1010L		1800 × 990	1720 × 925	600	60	
K-1100L		1765 × 1050	1640 × 940	650	65	
K-1200L		1870 × 1100	1735 × 995	660	65	
K-1220L		1760 × 1150	1640 × 1040	650	65	
K-1250L		1780 × 1170	1650 × 1040	660	65	
K-1280L		2020 × 1000	1970 × 970	630	70	
K-1465L	1965 × 1095	1850 × 970	760	65		
K-1500L	1920 × 1030	1860 × 980	790	70		
名称	型号	长 mm	宽 mm	高 mm		
印染加料专用桶	KBC-500L	740	740	1170		

方型桶 / Square barrel

It is one-shot rotomoulding tank which adopts imported PE materials. Frame or wheels can be arranged on it. It is easy to mowe and clean, hard waring and clash resistable, and good at corrosion-resistant, It can be used in for workshop reuse and transportation or used as storing soring our umits, It is widely used in fields such sa printing and dyeing garments, electronctcs.Etc.



K-30L



K-45L



K-150L



K-300L



K-1500L



印染加料专用桶



SQUARE BARREL SERIES

方桶（周转箱、印染布车等）系列

印染布车 / Printing and dyeing cloth car

印染布车采用国外进口聚乙烯塑胶原料（食品级PE原料），使用先进的滚塑工艺，一次滚塑加工成型；产品形状呈长方形敞口，颜色有白色、橘色、蓝色等。产品造型美观，内外光滑，无焊无缝、无毒无味、耐酸耐碱、耐碰撞、耐冲击，耐高温（80℃）、耐冷冻（-40℃）、不渗漏、不易老化、安装简便快捷、运输安全，是印染行业的首选。

Printing and dyeing cloth car with foreign imports of polyethylene plastic materials (food grade PE raw materials), the use of advanced rotational molding process, a rotational molding process; rectangular shape of the product exposure, color white, orange, blue and so on. Products handsome in appearance, smooth inside and outside, no welding seamless, non-toxic, tasteless, acid and alkali resistance, impact resistance, impact resistance, high temperature (80 °C), resistant to freezing (-40 °C), does not leak, not aging, easy to install convenient transport safety, is the preferred printing industry.




K-950L



印染布专用桶



K-1250L

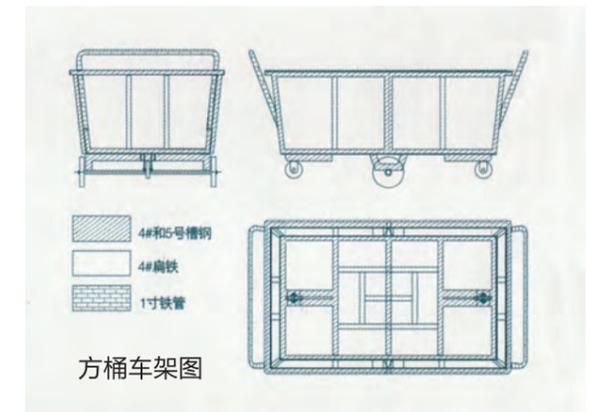

DRUM SERIES

圆桶系列

圆桶 / Drum

圆型周转桶, 选用全新进口PE为原材料, 一次成型, 滚塑工艺, 无毒无味, 卫生安全, 达到食品级使用要求。可配上推车或支架, 灵活轻便。可用作: 竹笋腌制桶、皮蛋腌制桶、泡菜桶、蜜饯腌制桶、落纱桶、饲料桶、漂染桶、养殖桶、发酵桶等。食品加工的储存、周转、清洗; 化工行业的酸洗、脱脂; 蔬菜加工行业的存放、发酵、腌制、贮存; 药品、食品、化工业中的拌料、兑制等; 纺织印染行业的周转、染色、存放等。

Circular revolving barrel, choose new imported PE as raw material, a molding, rotational molding, non-toxic and tasteless, health security, achieve food grade requirements. Can be provided with a cart or stand, flexible and lightweight. Available for: pickled bamboo shoots, preserved egg salted, pickled cabbage barrels barrels barrels, barrels, candied preserved duffing barrel, feed barrel, bleaching and dyeing barrel, barrel, barrel fermented culture etc.. Turnover, storage, cleaning, degreasing pickling food processing; chemical industry; vegetable processing industry, fermentation, storage, storage, pickled; drug food, chemical industry in the mixing, blending; textile printing and dyeing industry turnover, dyeing, storage etc..

圆桶参数表 / Drum parameter table

名称	型号	上口直径 mm	上口直径 mm	总高 mm	边宽 mm
圆桶	M-16L 带拎手	265	215	300	30
	M-26L	520	400	170	25
	M-50L	370	340	450	20
	M-120L	520	450	630	35
	M-200L	700	570	700	35
	M-230L 水产专用 (产品规格多种, 详见插页)	560	540	1040	20
	M-300L	800	700	700	40
	M-400L	920	760	710	40
	M-500L	1000	880	730	40
	M-600L	1070	920	810	60
	M-750L	1120	950	860	55
	M-1000L	1210	1070	940	60
	M-1200L	1350	1170	950	40
	M-1500L	1520	1450	800	40
	M-2000L	1470	1350	1380	55



M-16L



M-120L



M-200L



M-500L 低



M-600L



M-750L



M-1000L



M-1200L



M-1500L




HORIZONTAL STORAGE TANK SERIES

卧式储罐系列

PE 卧式储罐 / PE Horizontal Stocking Tank

采用进口耐酸碱 PE 原料，滚塑一次成型。产品适用于化工、电子、稀土、钴镍、冶金、医药、环保、染料等行业，能储运绝大多数无机酸、碱、盐类溶液和部分有机溶剂。并可做为与非开挖设备泥浆混配的泥浆罐。

It adopts imported PE material which is acid-and-alkali-resistant and is one-shot produced. The products apply to chemical industry, electronics, rare earth, metallurgy, medicine, environmental protection, dyeing, etc. It can stock majority of citric acid and alkali liquid and some organic solvent. In addition, it can be used as mud tank.

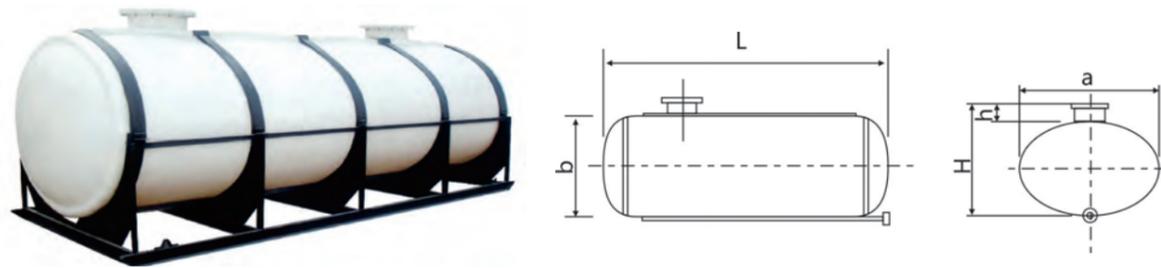

LT-10000L



LT-5000L



LT-2000L



LT-3000L



卧式储罐参数表 / Horizontal storage tank parameters table

名称	型号	长 mm	宽 mm	总高 mm	盖直径 mm	备注
卧 式 储 罐	LT-60L	510	410	460	180	—
	LT-2000L	1560	1470	1400	400	无架
	LT-2000L 圆	1700	1260(直径)	1420	400	无架
	LT-3000L	2000	1520	1580	400	无架
	LT-5000L	3650	1680	1105	400	带脚, 档板
	LT-10000L	4600	2000	1400		带铁支架, 档板
化工桶	HT-1000L	1150	980	1000	160	



AQUATIC BARREL SERIES

水产桶 (海鲜运输桶) 系列

产品说明 / Product Description

- ①产品材质: 韩国现代公司进口的 SR644 聚乙烯;
 - ②产品性能: 产品一次性成型内外光滑, 具有良好的卫生性、耐高温 (70°C), 耐冷冻 (-40°C), 耐腐蚀、耐撞击、不易老化、易清洗;
 - ③常用颜色: 白色、蓝色、橘黄色、红色、绿色、淡黄色;
- 备注: 因滚塑行业的特殊性, 产品的尺寸、容量、重量 ± 2%



1.04 米高



1.04 米高



1.04 米高



1.05 米高



1.1 米高



1.27 米高



0.95 米高



1.2 米



1.3 米高


PLUS KITS SALT DISSOLVING TANK SERIES

加药箱溶盐箱系列

加药箱 (平底) / Medicine Tank(Flat-bottomed)

采用进口 PE 原料，滚塑一次成型。内外光滑，不渗漏、不生青苔、不结垢，桶内易清洗，具有良好的卫生性和耐腐蚀性。且轻便易移，属设备配套之佳品。水处理、环保、水软化系统和加药系统等行业。

It is one-shot rotomoulding tank which adopts imported PE materials. It is easy to clean and good at corrosion-resistant. It is portable and used in many fields like water treatment, environment protection, medicine, etc.

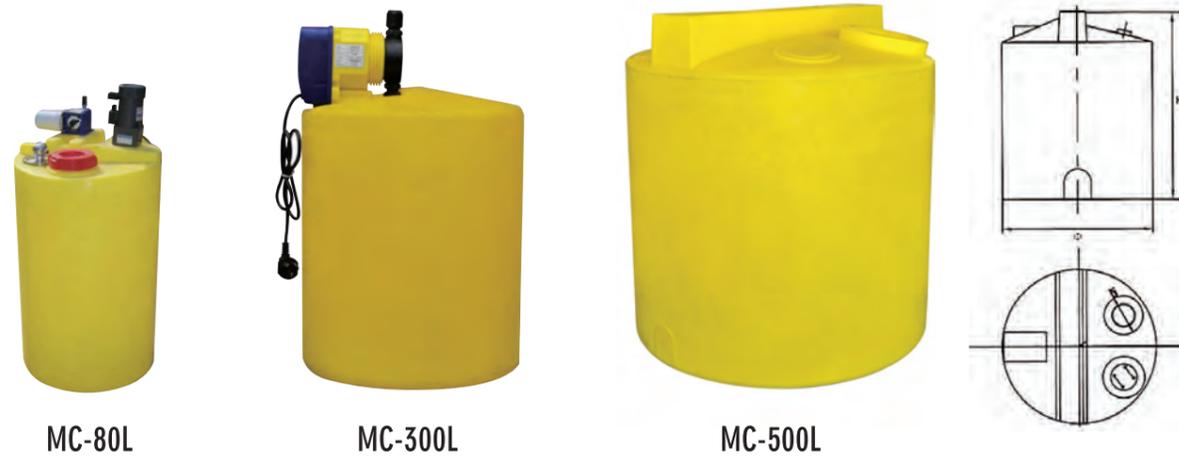

加药箱参数表 / Dosing tank parameter table

名称	型号	直径 mm	总高 mm	壁厚 mm	盖直径 mm
圆药桶	MC-40L	360	410	4.5	80
	MC-80L	460	600	5	160
	MC-100L	460	740	5	160
	MC-120L	510	720	5.5	80/510
	MC-200L	560	930	6.5	160
	MC-300L	730	930	6.5	160/400
	MC-500L	780	1110	6.5	160
	MC-800L	970	1230	7	400
	MC-1000L	1030	1320	7	160
	MC-1500L	1250	1500	7	160/400
方药箱	MC-2000L	1310	1750	7.5	160/400
	MC-3000L	1540	1900	8	160/400
	MC-5000L	1880	2200	10	160/400
	MC-6000L	1880	2500	10	160/400
	KC-40L	340 × 340	450	4.5	160
	KC-80L	340 × 340	760	5	160
	KC-120L	380 × 450	730	5	160
	KC-200L	570 × 570	790	6	160
	KC-500L	1020 × 700	830	6.5	160

溶盐箱 / Salt Dissolving Tank

采用进口 PE 原料，滚塑一次成型。内外光滑，不渗漏、不生青苔、不结垢，桶内易清洗，具有良好的卫生性和耐腐蚀性，且轻便易移。盐箱内配有盐板、盐井，实用且外形美观，属软水处理设备中的首选配套产品。

It is one-shot rotomoulding tank which adopts imported PE materials. It is easy to clean and good at corrosion-resistant, It is portable and has beautiful shape, is the first to be selected as assorted products for soft water treatment equipments.



溶盐箱参数表 / Parameters of Salt Dissolving tank

名称	型号	直径 mm × 高度 mm	总高 mm
溶盐箱	MC1-60L	340 × 630	700
	MC1-100L	390 × 790	850
	MC1-150L	500 × 820	880
	MC1-200L	500 × 940	1020
	MC1-300L	640 × 1070	1200
	MC1-500L	780 × 1150	1310
	MC1-800L	910 × 1170	1350
	MC1-1000L	1040 × 1220	1400
	MC1-1500L	1400 × 1120	1310
	MC1-2000L	1400 × 1420	1600
	MC1-3000L	1400 × 2150	2300



※ 因滚塑行业的特殊性，本表格所有产品的尺寸、容量 ± 3%；慈溪市远创塑料容器有限公司 电话：0574-63250939/63539806 传真：0574-63250938

AGRICULTURAL BOAT AND PONTOON SERIES

农用船及浮体系列

产品说明:

滚塑工艺，特别适合加工形状复杂、体积较大的浮体。一次成型，可制作较厚的壁厚，材料耐老化能力强，抗海水腐蚀，可加工各种比较特殊的颜色。

浮体类产品，因其用途不同，使用环境各异，浮体的外形、个体尺寸、受力结构设置、以及内部是否需填充发泡等，都不一样。请朋友们选购时，一定详细说明浮体的使用要求，以便于我公司设计出更符合您使用要求的合理结构。



滚塑划船



海上浮箱



SEPTIC SERIES

化粪池系列



适用范围:

住宅社区、写字楼、宾馆饭店、学校、医院、公共厕所、人群居住建筑物等场所的生活污水处理，食品加工企业的排水处理。

- 产品应用：生活污水处理；
- 处理能力：8-10 人 / 立方
- 产品颜色：黑色、蓝色、绿色（其他颜色可依据要求而定）；
- 使用原料：进口高密度食品级的聚乙烯；
- 技术工艺：使用大型温控型滚塑机，一次性滚塑成型；
- 安装运输：安装方便，简单易懂；
- 过滤及生物化理论处理能力强。




ACCESSORIES SERIES

配件系列

INSTALLATION INSTRUCTIONS

安装使用说明

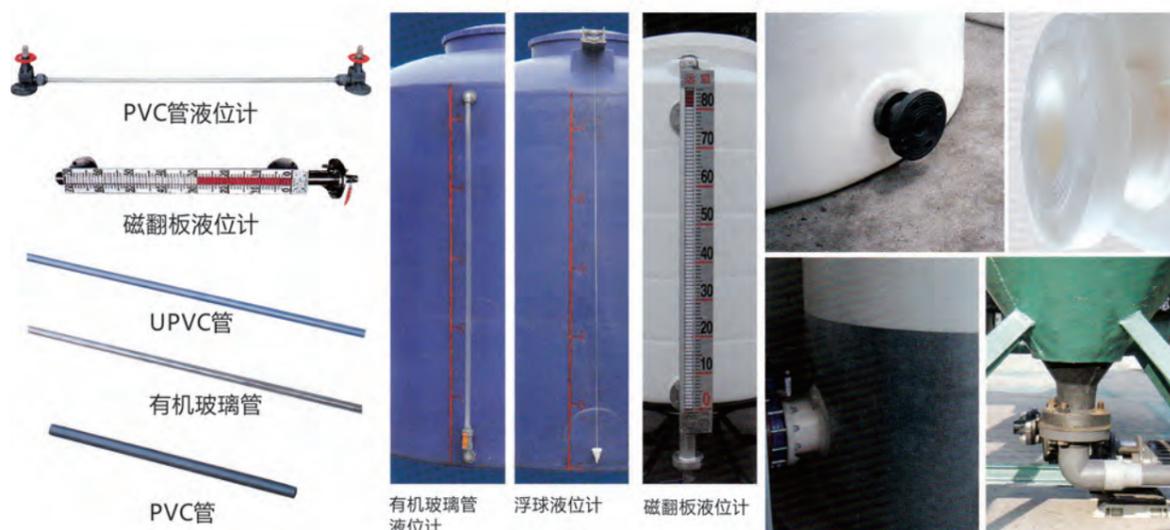

- 1、安装储罐的基础要求水平并能承受相应的压力，如用钢结构，间隙不能过大，并应在上面铺上木板或铁板。
- 2、储罐在储存化学物品时，场地四周应有良好的排液地沟与稀释装置。
- 3、由于储罐在成型时不可避免底部向罐内突起形成球冠状，因此基础要作成与底部形状相似的球冠状，在水平的基础上不用沙铺成与储罐底部相应的球冠状，在露天使用时适当避免阳光直接照射，延长使用寿命。
- 4、塑料储罐安装好后，在使用前应对接口的密封性能进行检查，可加液体超过接口部位观察是否泄漏。盛装化学液体的储罐，最好用水试漏，以防造成大量损失。
- 5、与储罐下部接头或法兰连接的管子要垂直于桶壁，最好使用软连接，以免装满液体后，桶壁上下不均匀膨胀导致接头连接受损导致泄漏，严重时损坏接头和桶体。pe 储罐
- 6、进液口离罐底较高时，进液口应弯向罐壁让进入液体顺着罐壁落下，减小对底部的冲击。
- 7、塑料储罐已带整体一次成型加强环，必要时可采用金属补强套来限制桶体的膨胀变形，从而避免底部膨胀。
- 8、在桶上安装搅拌机较重的附属设备时，或人须上罐顶作业而罐顶又不能承受人的体重时，请另做架子或人梯，并注意作业安全。
- 9、在不能控制液位的情况下，应装有溢流口，以防液体从人孔溢出，造成不必要的伤害。
- 10、进液、排液流量较大时，应装相应流量的排气管。
- 11、进液、排液流量较大时，应装相应流量的排气管。
- 12、在变换盛装液体时，请再次与我公司取得联系。
- 13、盛装过化学液体的储罐，不宜长时间在室外曝晒，否则将大大减短使用寿命。
- 14、储存化学液体的储罐根据储存的液体不同，3-5年应更换储罐。
- 15、若是运输用储罐，请确认透气孔是否开启。

